

NOTES: UNLESS OTHERWISE SPECIFIED


1. P/N: 9275COLOR
INSULATOR: MOLDED PVC. AVAILABLE IN TEN COLORS.
ALLIGATOR: STEEL. NICKEL PLATED.

2. P/N: 9202COLOR
HOUSING: MOLDED NYLON. AVAILABLE IN TEN COLORS.
FRAME: BRASS. NICKEL PLATED.
CONTACT: BeCu OR PHOSPHOR BRONZE. NICKEL PLATED.

3. P/N: W-200/COLOR
22AWG 65X40 TINNED COPPER
0.070 [1.78] O.D. PVC INSULATION
AVAILABLE IN TEN COLORS.

4. PERFORMANCE
MAXIMUM CURRENT: 2.5 AMPS
MAXIMUM VOLTAGE: 1000 (300 UL) W.V.D.C.
MAXIMUM TEMPERATURE: 221°F (105°C)

LTR	DESCRIPTION	DATE	APPROVEI

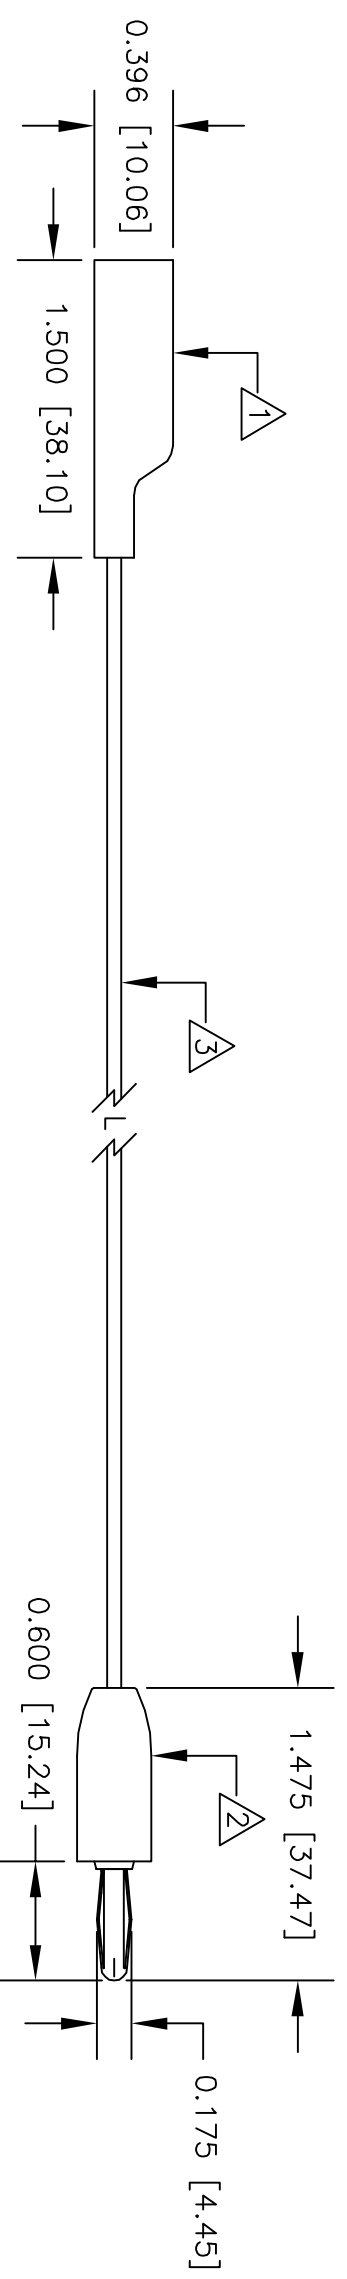

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES # .XX # # .XXX # #		CONTRACT NO.	
MATERIAL SEE NOTE.	FINISH SEE NOTE.	APPROVALS DRAWN R.L.	DATE 10/12
APPLICATION NEXT ASSY USED ON	DO NOT SCALE DRAWING	APPROVED BY	
DESCRIPTION MINI ALLIGATOR CLIP (9275) TO STD BAN PLUG (9202)		SIZE B	CODE IDENT NO. 08505
DRAWING NO. 280M		SCALE 1:1	DRAWING NO. 280M
			REV

E-Z-HOOK DIVISION OF TEKTEST INC.
ARCADIA, CA 91006 U.S.A.